



TEMPERATURE CONTROLS



DLC SERIES, DIGITAL COMBINATION CONTROLS						
MODEL NUMBER	VOLTS	MAX. AMPS	REPL. RELAY P/N	REPL. TRANS.	REPL. SENSOR P/N	SHIP WGT. Lbs./kg
C-DLC202	240	20	AHD-20-1	HDD50 2-4/1	DLC-10L	16
C-DLC204	480	20	AHD-20-1	HDD50 2-4/1	DLC-10L	(7.3)
C-DLC302	240	30	AHD-30-1	HDD50 2-4/1	DLC-10L	16
C-DLC304	480	30	AHD-30-1	HDD50 2-4/1	DLC-10L	(7.3)
C-DLC502	240	50	AHD-50-1	HDD50 2-4/1	DLC-10L	17
C-DLC504	480	50	AHD-50-1	HDD50 2-4/1	DLC-10L	(7.7)
C-DLC752	240	75	AHD-75-1	HD100 2-4/1	DLC-10L	23
C-DLC754	480	75	AHD-75-1	HD100 2-4/1	DLC-10L	(10.4)
C-DLC902	240	90	AHD-90-1	HD100 2-4/1	DLC-10L	25
C-DLC904	480	90	AHD-90-1	HD100 2-4/1	DLC-10L	(11.3)
C-DLC1202	240	120	AHD-120-1	HD100 2-4/1	DLC-10L	27
C-DLC1204	480	120	AHD-120-1	HD100 2-4/1	DLC-10L	(12.2)
C-DLC1502	240	150	AHD-150-1	HDD150 2-4/1	DLC-10L	33
C-DLC1504	480	150	AHD-150-1	HDD150 2-4/1	DLC-10L	(15)

Combination control consists of gasketed plastic enclosure, thermostat, 3 pole contactor and transformer.



DLC Series, Combination Control Features and Benefits

IMPROVES PROCESS CONTROL:

- ◆ Large (.50" high), easy to read LED display. Provides precise control for consistent plating and etch rates in most aqueous processes.

TEMPERATURE SENSOR:

- ◆ Fluoropolymer (FEP) covered 10-foot (3m), thermistor included standard with the control. Provides extended service in corrosive liquids and can be lengthened with ordinary copper wire.

CORROSION RESISTANT ENCLOSURE:

- ◆ NEMA 1, IP21, flame retardant and gasketed plastic enclosure with stainless steel hardware.

CAPACITIES:

- ◆ Large switching capacities from 20 to 150 amps for up to 600 volts.
- ◆ Adjustable temperature range from -58°F(-50°C) to 302°F(150°C).
- ◆ ± 1% full span, single digit accuracy.
- ◆ 14°F(-10°C) to 158°F(70°C) ambient temperature range.
- ◆ Single or three phase.
- ◆ Control transformer included.

CERTIFICATIONS: cULus


SAFETY FEATURES:

- ◆ Pre-wired P1 terminal blocks.
- ◆ Non-volatile memory.
- ◆ Programmable high alarm shutdown.
- ◆ Sensor short and break protection.
- ◆ Programmable high set point limit.
- ◆ Security code restricted menu.

OPTIONS AVAILABLE (consult factory):

- ◆ Celsius readout (must specify).
- ◆ P2, P3 or P8 thermal protection systems.
- ◆ Integrated liquid level control components.
- ◆ Front panel mounted digital timers..
- ◆ Ground fault protection of equipment (GFPE) circuitry.
- ◆ NEMA 4/4X enclosure (with internal heater for outdoor use).

DIMENSIONS

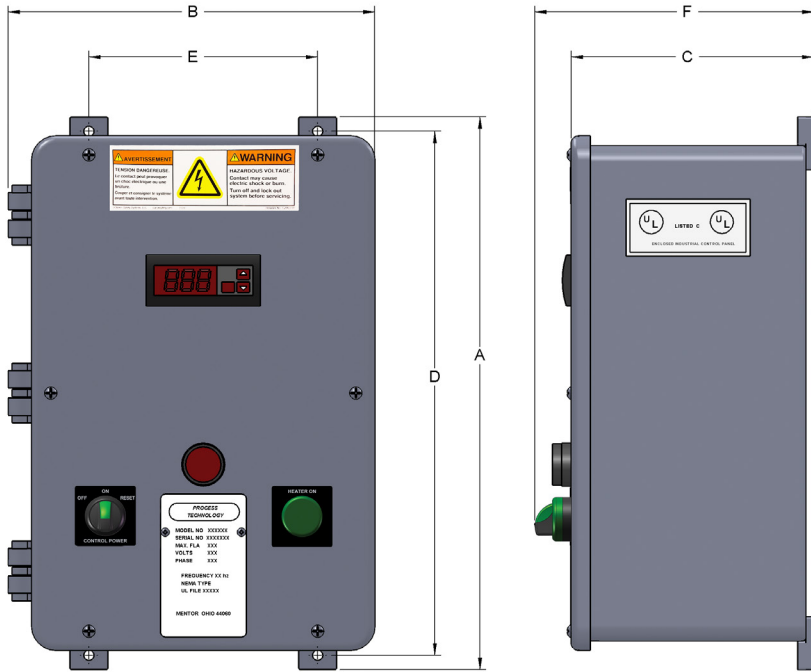

Dimensions	20-50 Amps	75-90 Amps	120-150 Amps
A	14.375" (365mm)	16.04" (408mm)	18.04" (458mm)
B	9.63" (245mm)	14.04" (357mm)	16.04" (408mm)
C	6.25" (159mm)	9.28" (236mm)	9.28" (236mm)
D	13.625" (346mm)	15.27" (388mm)	17.27" (439mm)
E	6" (152mm)	10.56" (268mm)	12.56" (319mm)
F	7.25" (184mm)	10.28" (261mm)	10.28" (261mm)

*Box dimensions may vary with options.

DLC COMBINATION CONTROL ORDERING INFORMATION

Control Type	Series	Amperes	Voltage	Control Option	Standard Options
C - Combo	DLC	20 30 50 75 90 120 150	2 - 240 3 - 380 4 - 480 5 - 415 6 - 600 7 - 400 8 - 208 9 - 220 0 - 200	E = Easyplug -C = Celcius display	-L = No sensor -25 = 25 foot thermistor -50 = 50 foot thermistor -F = FEP sensor sleeve -P2 = thermal protector 2 circuitry -P3 = thermal protector 3 circuitry -P8 = thermal protector 8 circuitry -*LC** = conductive liquid level -*ESP** = capacitive liquid level -D = digital timer -G = ground fault protection -N = NEMA 4X -NH = NEMA 4X with heater

ORDERING EXAMPLE:

C-DLC302-P2

DLC combination control, 30 amps, 240 volt, P2 thermal protection.

