

W SERIES, THERMOWELLS					
OVER THE SIDE WELLS					
THERMOWELL MATERIAL	DIA.	MODEL NO. 12" LENGTH (305mm)	MODEL NO. 24" LENGTH (610mm)	MODEL NO. 36" LENGTH (915mm)	SHIP WGT. Lbs./kg
Quartz	1/2"	WQ12	WQ24	WQ36	2 (1)
304 SS	1/2"	WF12	WF24	WF36	2 (1)
316 SS	1/2"	WS12	WS24	WS36	2 (1)
Titanium	1/2"	WT12	WT24	WT36	2 (1)
Fluoropolymer (FEP)	1/2"	WX12	WX24	WX36	2 (1)
1/2" NPT THREADED WELLS					
304 SS	1/2"	WFT12	WFT24	WFT36	2 (1)
316 SS	1/2"	WST12	WST24	WST36	2 (1)
Titanium	1/2"	WTT12	WTT24	WTT36	2 (1)
Fluoropolymer (FEP)	1/2"	WXT12	WXT24	WXT36	2 (1)

## W Series Features and Benefits

### APPLICATIONS:

- ◆ Secures and protects temperature control sensors in tanks.

### MATERIALS OF CONSTRUCTION:

- ◆ Quartz.
- ◆ 304 stainless steel.
- ◆ 316 stainless steel.
- ◆ Titanium.
- ◆ Fluoropolymer (PFA) covered 316 stainless steel.


### CAPACITIES:

- ◆ OVER THE SIDE MODELS: 1/2-inch diameter tubing with mounting flange standard.
- ◆ THREADED MODELS: 1/2-inch MNPT standard.

### OPTIONS AVAILABLE (consult factory):

- ◆ Special diameters.
- ◆ Meter sizes.
- ◆ Special lengths.

## DIMENSIONS

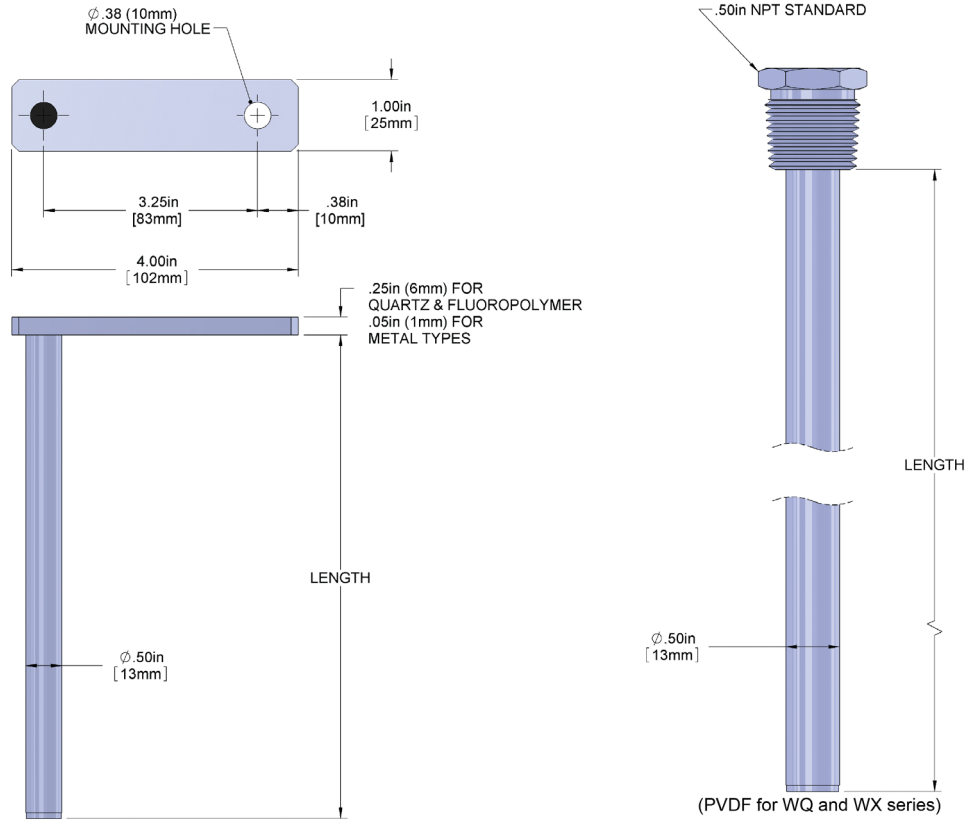

## THERMOWELL ORDERING INFORMATION

Series	Mounting	Length	Options
	no designator = flange mount T = 1/2" NPT connection	12 = 12" 24 = 24" 36 = 36" specify custom lengths	X = any special configuration not called out in the part number (specify in clear text)
	WQ = Quartz WF = 304 Stainless Steel WS = 316 Stainless Steel WT = Titanium WX = Fluoropolymer (FEP)		

### ORDERING EXAMPLE:

WS36

316 stainless steel thermowell, 36" long.

